



Starlet Eclipse

KamoGa
Karaoke | Movie | Gaming




Model: Starlet Eclipse


- Frequency Response (-3 dB): 210 Hz – 20 kHz
- Frequency Range (-10 dB): 189 Hz – 20 kHz
- Sensitivity (SPL / 1 W / 1 m): 90 dB ± 3 dB
- Driver Unit: 2 × 2.25"
- Rated Power: 40 W
- Peak Power: 60 W
- Nominal Impedance: 8Ω (when transformer bypassed)
- Product Dimensions: Ø 187 mm × 113 mm
- Cutout Size: Ø 160 mm
- Net Weight: 1.35 kg / piece
- Installation Method: Ceiling mounting, suspended mounting
- Ceiling Thickness (for installation): 13 – 38 mm

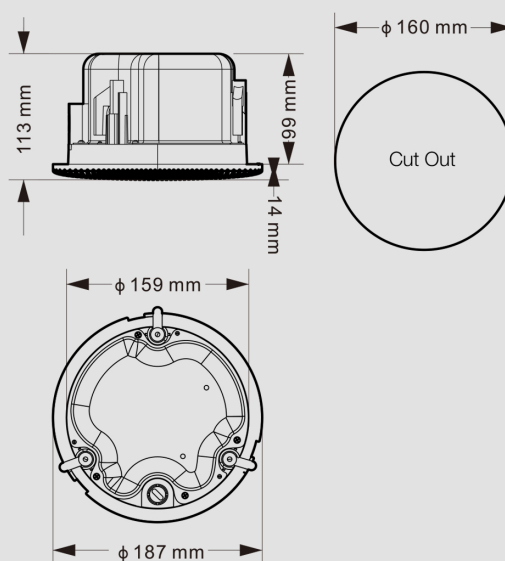

Transformer Taps:
8Ω, Bypass
70V line: 10 W, 20 W, 40 W
100V Line: 10W, 20W, 40W
(Daisy Chain Application)



Specific Wire Entry Path



Tilted 2.5" x 2" Driver
Position to hit sweet spot
Position to bounce off walls

Find out more setup information and Detailed information at www.thunderstone.technology

4K dts DOLBY Bluetooth HDMI MAXXAUDIO

Compatible Systems (Optional)

KMG-B1 is supplied in box. Other bracket accessories are optional items by Bose
KMG3.1 Basic wiring and installation \$380, KMG 7.1 Basic wiring and installation \$580

