




2" LCD screen

Display Current Voltage
Power On/Off
Date and Time
Menu and edit functions

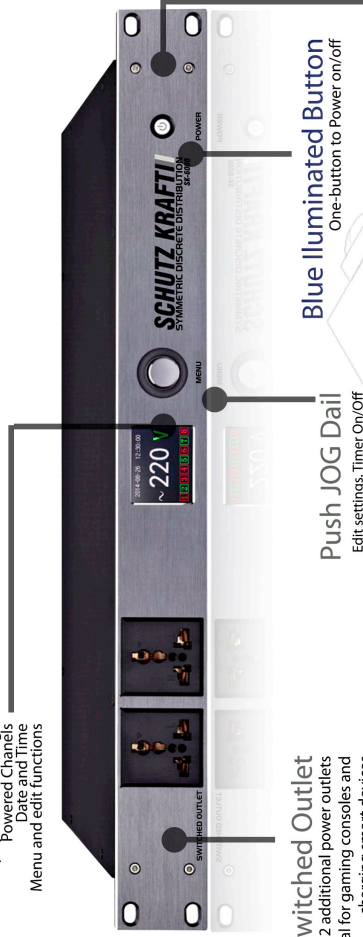

Switched Outlet

2 additional power outlets
Ideal for gaming consoles and
charging smart devices

Push JOG Dial

Edit settings: Timer On/Off
4 Groups Data, Load, Save functions
Under/Over Voltage protection
Delay function to trigger 8 channels

Blue Illuminated Button

One-button to Power on/off

Rack Mount

Suitable for both residential and
professional installs

FEATURES

- 2" Large LCD screen
 - Power-up in 8 delayed outlet groups
 - 2 switched outlets
 - Programmable sequence
 - Power-down in reverse programmable sequence
 - Under-Voltage and Over-Voltage surge protection(Uovo5)
 - RFI Filtering with multi-stage EMI/RFI filter
 - Rated 13A per outlet/30A total outlet
 - Multiple units maybe daisy chained
 - RS-232 Connectivity for external control
 - Circuit breaker
 - Timer function
- Sequenced powering is able to prevent excessive in-rush currents that may cause circuit breakers to trip even though the steady currents are not excessive. The affordable Schutz Kraft KS-6000-SE is a simple device - to apply and remove power in a controlled and repeated, fool-proof 8-step sequence, ideal for large installations where personnel handling the equipment are inexperienced. The Schutz Kraft KS-6000-SE provides eight power outlets, that receives adjustable 0-999s power individually, after the front panel sequence switch is switched to "ON." When switched to "OFF," the sequence is reversed as per programmed (adjustable 0-999s). In addition to the delayed outlets, a double front panel outlet is powered through the main power on/off switch. All rear panel outlets are standard 240V, 13A single panel type. Under Voltage and Over Voltage Surge protector, set your desired voltage to auto trigger system shutdown.

DESCRIPTION

The Schutz Kraft KS-6000-SE Power Sequencer is required when various equipment have to be triggered on in a sequence or off simultaneously. In audio system, sequenced powering is often necessary to allow turn-on transients from low level amplifiers and processors to settle down before any power amps are turned on, because simultaneous powering will result in a loud annoying, and potentially destructive to the speakers. In any large system with components present an inductive load to the AC line (including electric motors, power supplies, and power amplifiers of all kinds).

OPTIONS

Model KS-6000 : Symmetric Discrete Distribution Sequencer. This model is identical to the KS-6000-SE with the EMI/RFI filter.

All Models: KS-6000-SE/KS-6000 allow daisy chain accessories.. Connect multiple units to trigger with only one button . Trigger with timer and protect your system with Under or Over Voltage surge.

Symmetric Discrete Distribution ONE BUTTON Operation Large LCD display Noise Removal Turn ON in Sequence, Turn OFF in Sequence

KS-6000-SE Specifications for Architects and Engineers

The Power Sequencer provides 8 delayed outlets with programmable delay interval set at user's preference/s. The ON/OFF control is via front panel master switch or via remote RS-232 connected with serial cable (ferrite core). The KS-6000-SE also features the following:

- Relay Outlet Switching - with silver cadmium oxide contacts rated at least 30 amps for inductive or resistive loads; relay life expectancy of at least 100,000 operations at rated load; 3 oz. copper FR4 glass epoxy-printed circuit boards
- Power Signal Indicator LCD/LED lights
- 13 amps rated outlets
- 2 unswitched front outlets; spikes at all outlets clamped to user defined over-peak or under-peak (line to neutral, line to ground, or neutral to ground) under the (Uovo5) technology
- Response time (not exceeding)1 nanosecond
- RF noise attenuation (of over) 40dB (Transverse mode) and 60dB(common mode) from 1 to 200Mhz

The KS-6000-SE Power Sequencer is a rack mount unit - a standard rack; occupies no more than 1 unit (1.75") of rack space; 15A amp circuit breaker; AC cord provided - 14 ga. and 8 ft long

Three-Year Warranty

The Schutz Kraft KS-6000-SE and KS-6000 are protected by a three-year limited warranty covering defect/s in material/s and workmanship/s.

KS-6000-SE/KS-6000 Specifications

Maximum Load:	KS-6000-SE 30 Amps KS-6000 30Amps 190-250 VAC 0-999s
Input Voltage:	Line to neutral, neutral to ground
Delay Interval:	line to ground
Uovo5 Surge mode:	1 nano second
Uovo5 Clamping Voltage:	KS-6000-SE : Transerve and common modes: 20dB @ 200KHz, rising to >40dB 1 to 100MHz
Response time:	536 x 410x 80 mm
Noise Attenuation:	6.5Kg
Dimension:	Steel chassis, zinc chromate plating. Brushed aluminium front panel: 3oz copper double sided glass epoxy printed circuit board.
Weight:	
Construction:	

Available from:

Thunderstone Technology (S) Pte Ltd
61 Ubi Rd1, Oxley Bizhub
#01-16 Singapore 408727
Tel: 67026577
Fax: 67026578
kamal@thunderstone.technology

