


SPEAKERS 7a

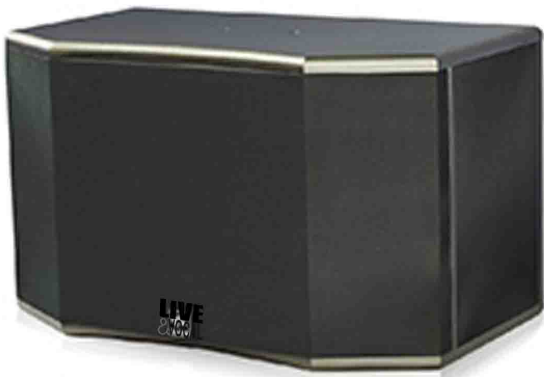

LVA-119

280W , 580 W RMS
13.5KG

LIVE & VOCAL



2x3" Tweeters

4x2.5" Mid

1x10" Base

80hm
280W
560W(RMS)
95dB (Max Vol)
30 Kilograms
310 x 525 x 270 (mm)

The 34Hz low frequency emanating from its 10" bass cone sets an immediate "Oomph" down your spine. The LVA-119 also boasts two 3" tweeters and four 2.5" to enhance your vocals and to sprinkle a sense of warmth in the overall mid-range frequency you desire.



Hanging Instructions

Please use LVA Speaker brackets. Avoid mounting close to walls. Leave a 3-inch distance from walls.

Sensitivity 1W to 1m, $f > 80$ Hz 94 dB SPL 94 dB SPL (1)
Maximum continuous level to 1m, ($f > 80$ Hz) 105 dB SPL
Peak continuous level to 1m ($f > 80$ Hz) 112 dB SPL
Coverage angles 120° Conical (2)
Nominal impedance 8 Ohm
Construction and characteristics
Cabinet 12 mm MDF

Passive crossovers Air-core inductors, paper capacitors, wound resistors
Overload protection Thermal circuit breaker with automatic reload
Finish black paint (LVA119B)
Front panel Black stretched Jersey (LVA119SJ),
Connectors Dual binding posts (LVA119)

*Tip: Constantly use your speakers as it will soften the rubberise ring attached to the driver cone. Rubber may become brittle for unattended use